

BID TABULATION

11/8/2015

Ogunquit Main Beach Bathhouse  
Includes Addendum 2

	BID 1	BID 2	BID 3	BID 4	BID 5	BID 6	BID 7
DEMO	K.J. Fisher and Sons, LLC	Rangeley Enterprises	Concord Building Services, Inc.				
	\$ 24,496.00	\$ 28,000.00	\$ 43,600.00				
EARTHWORK	K.J. Fisher and Sons, LLC	Rangeley Enterprises					
	\$ 43,679.00	\$ 52,000.00					
CONCRETE FOUNDATION	Bob Frizzell Gernal Contractor Inc.	Rangeley Enterprises					
	\$ 9,466.00	\$ 39,500.00					
CONCRETE SLAB	Bob Frizzell Gernal Contractor Inc.	A.P. Concrete Floors, Inc.	Rangeley Enterprises				
	\$ 18,474.00	\$ 29,600.00	\$ 45,000.00				
CONCRETE MATERIALS	Hissong Ready-Mix & Aggregates, LLC	J.G. MacLellan Concrete Co., Inc.					
	\$102/cy	\$110.50/cy					
MASONRY	Frederick A. Meyer III & Sons, Inc.	Keith Buckovitch Masonry	Mas-Con Corp.	AA & D Masonry LLC			
	\$ 78,000.00	\$ 85,000.00	\$ 100,000.00	\$ 104,173.00			
CARPENTRY (L)	Alexander Construction	Chestnut & Cape Inc.	J.D. MacDougall, Inc.				
	\$ 25,000.00	\$ 48,900.00	\$ 56,101.00				
FRAMING LUMBER	Hammond Lumber Company	Eldredge Lumber & Hardware, Inc.					
	\$ 18,146.46	\$ 20,000.00					
CASEWORK & MILLWORK	WS Dennison Cabinets, Inc.	Pond Cove Millwork, Inc.	J.D. MacDougall, Inc.				
	\$ 22,120.00	\$ 22,930.00	\$ 37,230.00				
SIDING	Alexander Construction	Chestnut & Cape Inc.	J.D. MacDougall, Inc.				
	L \$ 15,000.00	\$ 26,500.00	\$ 45,000.00				
	M \$ 30,621.00	\$ 30,621.00	\$ 30,621.00				
WINDOW (M)	Alside Supply Center	Kaycan Building Products					
	\$ 2,495.50	\$ 2,635.22					
ROOFING	Alexander Construction	Alside Supply Center	Willco Sales & Service, Inc.	Hammond Lumber Company			
	L \$ 7,500.00						
	M	\$ 3,582.02	\$ 4,561.32	\$ 6,177.85			
DOORS	Overhead Door Company of Portland						
	\$ 18,214.00						
TOILET PARTITIONS	Overhead Door Company of Portland						
	\$ 39,406.00						
SIGNAGE	Silva Graphics	Portsmouth Sign Company					
	\$ 1,332.50	\$ 1,500.00					
PVC CEILING	J.D. MacDougall, Inc.						
	\$ 67,473.00						
EPOXY FLOORING	Paul G. White Company	DDES, LLC	Northeast Flooring Solutions	Premier Concrete Construction, LLC	Black Bear Coatings & Concrete	Hascall & Hall	Boston Garage
	\$ 21,125.00	\$ 23,500.00	\$ 23,634.00	\$ 24,715.00	\$ 25,310.00	\$ 25,501.00	\$ 37,020.00
WALL TILE	Paul G. White Company		Northeast Flooring Solutions				
	Included		\$ 4,851.00				
PAINT	Johnatan & Elizeu LLC	ACE Painting					
	\$ 12,750.00	\$ 15,700.00					
PLUMBING	Riverside Mechanical Inc.	Hy-Tech Plumbing Heating and Mechanical, Inc.	CPH Mechanical, Inc.	Pullen Bros. Inc.			
	\$ 199,575.00	\$ 196,000.00	\$ 306,822.00	\$ 425,765.00			
HVAC	Riverside Mechanical Inc.		CPH Mechanical, Inc.	Pullen Bros. Inc.			
	Included		Included	Included			
ELECTRICAL	Mancini Electric						
	\$ 56,950.00						
Signs	Silva Graphics	Portsmouth Sign Company					
	\$1,333.00	\$1,500.00					

# PURCHASE ORDER



**DeStefano & Associates, Inc.**  
 PLANNING • DESIGN • CONSTRUCTION

Phone 603.430.0339  
 Fax 603.430.0346  
 2456 Lafayette Road, Suite 3  
 Portsmouth, NH 03801

<b>Project Name:</b> Main Beach Bathhouse Renovations 124 Beach Street, Ogunquit, ME 03907		<b>Trade:</b> Sawcut Demo	<b>Date:</b> 12/02/2019
<b>Vendor:</b> Moore concrete Cutting 183 State Route 125 C-3 Brentwood, NH 03833  <b>Contact Name:</b> Daryl Moore <b>Phone No./Email:</b> 603-818-7004 dmoore@mooreconcretecutting.com		<b>Ship To:</b> Peter Connell 124 Beach Street Ogunquit, ME 03907  <b>Contact Name:</b> Peter Connell <b>Phone No./Email:</b> 603-520-7354 peterc@destefano-associates.com	
<b>Terms:</b> NET 30, unless noted otherwise		<b>Conditions:</b> The Vendor, by accepting this order, whether in writing, verbally, or by cause of conduct, agrees to the terms and conditions on <u>page two</u> of this order.	

**Per Quote Date:** 12/02/2019

Item	QTY	Description	Unit Price	Amount
	24.00	Saw Cut, Demo, and remove for: 10 window openings, 12 flood vents, 1 door, and two cuts on the current lifeguard wall	\$400.00	\$9,600.00

<b>Notes:</b> Certificate of Insurance required from Vendor prior to shipment and payment. Reference DAI Insurance Requirements.	<b>Subtotal</b>	\$9,600.00
	<b>Sale Tax ( %)</b>	\$0.00
	<b>Total</b>	\$9,600.00

<b>Referenced Documents:</b> Quote Number 399675	
<b>Drawing/Specification:</b> N/A	<b>Schedule:</b> N/A
<b>Supplemental Conditions:</b> Safety Conditions	<b>Shop Drawings by:</b> N/A
<b>Payment Instructions Dated:</b> 02/04/2019	<b>Delivery to Site After DAI Approval:</b> TBD
<b>Other:</b> Certificate of Insurance	<b>Completion of Work:</b> TBD
<b>Verbal Order Agreed by:</b> John DeStefano	<b>Date:</b> 12/02/2019

Agreed & Accepted

<b>Purchaser:</b> John DeStefano	<b>Vendor:</b>
<b>Title:</b> Project Manager	<b>Title:</b> President



DEC 02 REC'D

QUOTE

Order #: 399675

OPERATOR

- 0

QUOTES

183 STATE ROUTE 125 C-3  
BRENTWOOD, NH. 03833  
(603) 626-0440 (603) 642-7148 Fax

CUSTOMER INFORMATION	
DESTEFANO ASSOCIATES 2456 LAFAYETTE RD PORTSMOUTH, NH 03801	<u>Cust #</u> DES888
(603) 430-0339 Fax: (603) 430-0346	
Ordered By: JOHN D	
Salesman: DARYL MOORE	
JOB INFORMATION	
Job Date: 11/27/19 (Wednesday)	
Arrival: 7:00AM	
Estimated Hours: 8.00	\$ 9600
PO #:	
Job Request #:	
Order Entered: 11/27/19 08:44am	By: DMOORE
Salesman: DMOORE	
Tax Status:	

JOB SITE INFORMATION	
BATHHOUSE RENO 124 BEACH ST	
OGUNQUIT, ME (603) 520-7354	
Area: ME	Map Code:
Jobsite: None	Foreman: PETER
General Contractor:	
Owner:	
Needed At Site	
Distance: 0	Elevation: 0
ECP:	

Quantity	Details	Description	Unit	Price
24.00	SAW CUT, DEMO, AND REMOVE FOR:	10 window openings, 12 flood vents, 1 door, and two cuts on the current lifeguard wall	400.00	9,600.00
			<b>TOTAL:</b>	<b>\$9,600.00</b>
WATER AND LAYOUT BY DESTEFANO				

Approved & Accepted  
JTD  
12/2/19



# Request for Taxpayer Identification Number and Certification

Give Form to the requester. Do not send to the IRS.

Go to [www.irs.gov/FormW9](http://www.irs.gov/FormW9) for instructions and the latest information.

Print or type. See Specific Instructions on page 3.

**1** Name (as shown on your income tax return). Name is required on this line; do not leave this line blank.  
**Moore Concrete Cutting, Inc**

**2** Business name/disregarded entity name, if different from above

**3** Check appropriate box for federal tax classification of the person whose name is entered on line 1. Check only one of the following seven boxes.

Individual/sole proprietor or single-member LLC     C Corporation     S Corporation     Partnership     Trust/estate

Limited liability company. Enter the tax classification (C=C corporation, S=S corporation, P=Partnership) ▶ \_\_\_\_\_

**Note:** Check the appropriate box in the line above for the tax classification of the single-member owner. Do not check LLC if the LLC is classified as a single-member LLC that is disregarded from the owner unless the owner of the LLC is another LLC that is not disregarded from the owner for U.S. federal tax purposes. Otherwise, a single-member LLC that is disregarded from the owner should check the appropriate box for the tax classification of its owner.

Other (see instructions) ▶ \_\_\_\_\_

**4** Exemptions (codes apply only to certain entities, not individuals; see instructions on page 3):

Exempt payee code (if any) \_\_\_\_\_

Exemption from FATCA reporting code (if any) \_\_\_\_\_

(Applies to accounts maintained outside the U.S.)

**5** Address (number, street, and apt. or suite no.) See instructions.  
**183 Route 125 Unit C3**

**6** City, state, and ZIP code  
**Brentwood NH 03833**

**7** List account number(s) here (optional)

Requester's name and address (optional)

## Part I Taxpayer Identification Number (TIN)

Enter your TIN in the appropriate box. The TIN provided must match the name given on line 1 to avoid backup withholding. For individuals, this is generally your social security number (SSN). However, for a resident alien, sole proprietor, or disregarded entity, see the instructions for Part I, later. For other entities, it is your employer identification number (EIN). If you do not have a number, see *How to get a TIN*, later.

**Note:** If the account is in more than one name, see the instructions for line 1. Also see *What Name and Number To Give the Requester* for guidelines on whose number to enter.

**Social security number**

			-				-			
--	--	--	---	--	--	--	---	--	--	--

OR

**Employer identification number**

2	6	-	3	0	7	3	4	0	9
---	---	---	---	---	---	---	---	---	---

## Part II Certification

Under penalties of perjury, I certify that:

- The number shown on this form is my correct taxpayer identification number (or I am waiting for a number to be issued to me); and
- I am not subject to backup withholding because: (a) I am exempt from backup withholding, or (b) I have not been notified by the Internal Revenue Service (IRS) that I am subject to backup withholding as a result of a failure to report all interest or dividends, or (c) the IRS has notified me that I am no longer subject to backup withholding; and
- I am a U.S. citizen or other U.S. person (defined below); and
- The FATCA code(s) entered on this form (if any) indicating that I am exempt from FATCA reporting is correct.

**Certification instructions.** You must cross out item 2 above if you have been notified by the IRS that you are currently subject to backup withholding because you have failed to report all interest and dividends on your tax return. For real estate transactions, item 2 does not apply. For mortgage interest paid, acquisition or abandonment of secured property, cancellation of debt, contributions to an individual retirement arrangement (IRA), and generally, payments other than interest and dividends, you are not required to sign the certification, but you must provide your correct TIN. See the instructions for Part II, later.

**Sign Here**    Signature of U.S. person ▶ *Mander Payne*    Date ▶ *6/14/18*

## General Instructions

Section references are to the Internal Revenue Code unless otherwise noted.

**Future developments.** For the latest information about developments related to Form W-9 and its instructions, such as legislation enacted after they were published, go to [www.irs.gov/FormW9](http://www.irs.gov/FormW9).

## Purpose of Form

An individual or entity (Form W-9 requester) who is required to file an information return with the IRS must obtain your correct taxpayer identification number (TIN) which may be your social security number (SSN), individual taxpayer identification number (ITIN), adoption taxpayer identification number (ATIN), or employer identification number (EIN), to report on an information return the amount paid to you, or other amount reportable on an information return. Examples of information returns include, but are not limited to, the following.

- Form 1099-INT (interest earned or paid)

- Form 1099-DIV (dividends, including those from stocks or mutual funds)
- Form 1099-MISC (various types of income, prizes, awards, or gross proceeds)
- Form 1099-B (stock or mutual fund sales and certain other transactions by brokers)
- Form 1099-S (proceeds from real estate transactions)
- Form 1099-K (merchant card and thrd party network transactions)
- Form 1098 (home mortgage interest), 1098-E (student loan interest), 1098-T (tuition)
- Form 1099-C (canceled debt)
- Form 1099-A (acquisition or abandonment of secured property)

Use Form W-9 only if you are a U.S. person (including a resident alien), to provide your correct TIN.

If you do not return Form W-9 to the requester with a TIN, you might be subject to backup withholding. See *What Is Backup Withholding*, later.

A 4/4

E+B Line Item / Revision due to Geotech.

Basis =	\$ 9516	Ref Fisher 12/30/19
=	\$ 40675	Ref Fisher 12/30/19
=	\$ 2040	Ref Riverside 12/23/19
=	(6000)	Ref Fisher 12/30/19
#	10,223.50	Total
	<del>12,240</del>	Per Rota
	2,016.50	Adds to Contingency

Water Line Around Building

Basis =	\$ 8566	Ref Fisher 12/30/19
=	(2000)	Ref Fisher 12/30/19
#	6566	Total
=	-711	Ref Fisher 12/23/19
=	672	Ref RKWWD 12/18/19
#	<del>672</del>	Revised Total
#	39	Adds to Contingency

Bid FORM

Additional Scope Proposal

Friday December 20, 2019

Project: Main Beach Bathhouse Renovations

K J Fisher & Sons LLC

Location: Ogunquit, Maine

95 Old Center Rd

Deerfield, NH 03037

Cell 603.300.7432/Office 603.463.9785

Company Name: K J Fisher & Sons LLC

Contact: Dana Merrill

Phone Number: 603.502.9162,

Email: [kfishersons@gmail.com](mailto:kfishersons@gmail.com), [dana.kjf@gmail.com](mailto:dana.kjf@gmail.com)

The following is a bid for additional work at the Ogunquit Maine, Beach S. Bath House Project, rev 02. We the undersigned, agree to execute the Contract in the form included with the Proposal Documents and agree that our proposal is valid for thirty (30) days. Total value for additional work is \$ 14,837.00.

K J Fisher & Sons LLC



Dana L. Merrill  
Project Manager/Estimator

(Authorized Representative)

Approved & Accepted  
JAD  
12/23/19

Scope of work to be performed: Ogunquit Main Beach Bathhouse Renovation

Work detail:

**Credit; interior Perimeter drain-160 LF of interior perimeter drain. Excavation and backfill existing material. Credit dollar amount is \$6,000.00,**

**Credit: Expose the sewer and water connections north side of building: \$2,000.00**

**Adds: Building Interior (240 LF of new frost wall/footing) \$9,516.00**

- Excavate/backfill (240LF) of new 2' deep x 4' wide. \$7150.00
- Material: backfill with clean granular fill (240 LF; 2'deep x 4' wide. 71 CY)
  - Remove from site unsuitable soil to the town 71 CY (5 loads), \$381.00
  - Furnish clean granular fill 100 tons (240 LF) (5 loads) \$1,985.00

**Building Exterior frost wall unsuitable material replacement, \$4,067.60**

- Remove from site unsuitable soil deliver to town. 125 CY, \$610.00
- furnish and install 162 LF of 3.5'x2' back fill 176 tons, 8 loads. \$3,457.6

**Water Line 125 LF \$8,566.0**

- Furnish 3" HDPE pipe and fittings, \$2830.15.
- Assemble and install pipe \$2,500.00
- 1" testing connections. \$485.80
- ~~Chlorinate and test \$2,000.00 (Item deleted from bid per GC request)~~
- Saw cut, remove pavement along beach street. \$225.00
- Excavate and haul pavement to recycle facility, \$265.00
- Excavate 10' x 4' x 6' deep, curb stop to frost wall, and a long Beach St. to the new footing cut. 30 CY. \$1350.00
- Remove unsuitable soil deliver to town 30 CY. \$ 150.00
- Replace all back-fill material, curb stop to frost wall 25 tons, \$530.00
- Furnish and install pipe bedding-Sand \$230.00

**Cupola (remove and salvage existing Cupola with weather vane) \$687.50**

- Remove cupola, weather vane, store in Conex.

Cupola

Bid FORM

*Additional Scope Proposal*

Friday December 20, 2019

*Project: Main Beach Bathhouse Renovations*

*K J Fisher & Sons LLC*

*Location: Ogunquit, Maine*

*95 Old Center Rd*

*Deerfield, NH 03037*

*Cell 603.300.7432/Office 603.463.9785*

Exclusions:

- Landscaping, landscape irrigation
- All concrete work except as specifically noted in the scope of work
- Removal, disposal, and replacement of unsuitable materials.
- Removal of fuel storage tanks
- Removal of asbestos materials
- Guardrail or fencing except as noted.
- NPDES discharge permits, or MWRA entrance fees
- Removal and disposal or other handling of any hazardous or contaminated soils, groundwater or materials
- Any ledge blasting and/or probing. See Unit Pricing.
- Soils testing of any kind
- Any landscaping, planting, sodding, mulching, fertilizing, or irrigation
- Bracing, support, relocation or removal of any utility pole
- Fine grading of topsoil
- Bracing and/or shoring of new concrete walls
- Wetland replication
- Site security
- Permits and any other fees not specified in the scope of work
- Relocation or removal of utility poles or any overhead wires
- Off-site excavation & back fill for telephone, cable, electric
- Under pinning of existing foundations
- Winter conditions Snow and frost removal
- boulders greater than 1/2 CY.
- Temporary paving except as noted

*(Note; This bid offer implements GIF recommendations identified in the scope of work for this document only. It does not imply agreement to implement all recommendations in the geotechnical information report.)*

*(Note; Water line material list submitted for approval to PM on 12/17/2019, and reprinted here.)*

Bid FORM

Additional Scope Proposal

Friday December 20, 2019

Project: Main Beach Bathhouse Renovations

K J Fisher & Sons LLC

Location: Ogunquit, Maine

95 Old Center Rd

Deerfield, NH 03037

Cell 603.300.7432/Office 603.463.9785

BID NO: B368547

Cust Phone:

Bid Date: 12/16/19

Terms:

Quoted By: MAP

Customer: KJ FISHER & SONS LLC  
95 OLD CENTER ROAD  
DEERFIELD, NH 03037

Ship To:

Cust PO#: OGUNQUIT, ME

Job Name:

Item	Description	Quantity
	OGUNQUIT BATH HOUSE: OGUNQUIT, ME	
	----- TO GET OFF 2" CTS:	
MH15451NK	LF 2 CTS COMP X FIP COUP	1
FINSERT55	2 CTS PET INS STFNR	1
P7100200S411	2 MPT 304 X SDR11 TRANS COUP	1
S30RE111118860	3X2 IPS EF RED DR11	1
	----- PIPING MATERIAL:	
PE111E4CM	3 IPS PC200 DR11 4.0 EF COUP PRICED "AS NEEDED"	1
PE111AM40	3X40 IPS DR11 HDPE PIPE IN STOCK IN FITCHBURG, MA	160
FFREIGHT	FRT CHARGE FEE	1
S30DK111110088	3 IPS EF 45 DR11 3" EF 90'S ARE NOT AVAILABLE	12
	----- TO GET BACK ON 2" CTS:	
S30RE111118860	3X2 IPS EF RED DR11	1
P7100200S411	2 MPT 304 X SDR11 TRANS COUP	1
MH15451NK	LF 2 CTS COMP X FIP COUP	1
FINSERT55	2 CTS PET INS STFNR	1

Additionally, curb stop valve box and rod. 1

Additionally, 3"x1' saddle, 100 LF CTS, 1" curb box & rod, 1" corp, female comp by adapter and plug.

R 4/7

**CAP701 - CHANGE ORDER FORM**

Change Order Number: 20235-2 Sleeves

Change Order Date: 12/23/2019

Architect's Project Number:

Project: OGUNQUIT BATHHOUSE

Our Project Code: OGUNQUIT BATHHOUSE

Contract Date: 11/25/2019

Contract for: OGUNQUIT BATHHOUSE

To:

DeStefano & Associates  
2456 Lafayette Road, Suite 3  
Portsmouth, NH 03801

From:

RIVERSIDE MECHANICAL INC  
27 REBECCA WAY  
FALMOUTH, ME 04105

Original Contract Sum:	199,575.00
Net Change by Previous Change Orders:	0.00
Contract Sum:	199,575.00
Value of this Change Order:	2,640.00
New Contract Sum:	202,215.00

DISTRIBUTE TO:

Contractor

The Contract Completion date will change by:

The expected completion date will be: / /

The Contract is Changed as Follows:

Cost to provide and layout 8" PVC sleeves for the sanitary piping through the frost walls

Material	\$480.00
Labor	\$2160.00

Architect

Signature

Date

Contractor

Signature

12/26/19

Date

Owner

Signature

Date



# Work Order Change Request

**K J Fisher & Sons LLC**

INVOICE # 0047  
 DATE: 12/23/2019

95 Old Center Road, Deerfield, NH 03037  
 Phone 603.463.9875  
 Email kjfishersons@gmail.com

**TO** Peter Connell  
 DeStefano & Associates  
 2456 Lafayette Rd. Suite 3  
 Portsmouth, NH 03801  
 Phone (cell) 603.520.7345, (Office) 603.430.0339

PROJECT MANAGER/FISHER ASSOCIATE	PROJECT NAME	LOCATION	MONTH
Lionell	Ogunquit Bath House	Ogunquit Maine	December 2019

DATE	DESCRIPTION	UNIT PRICE	LINE TOTAL
12/23/2019	CREDIT: Water main adds "45' trench excluding piping" was not selected.	\$711.00	(-) \$711.00
		<b>SUBTOTAL</b>	\$(-)711.00
		<b>SALES TAX</b>	0.00
		<b>TOTAL</b>	\$(-)711.00

Prepared by: Dana L Merrill Estimator/PM

THANK YOU FOR YOUR BUSINESS!

R 6/7

KENNEBUNK, KENNEBUNKPORT & WELLS WATER DISTRICT  
 92 Main Street, P.O. Box 88  
 Kennebunk, ME 04043

Phone (207) 985-3385  
 Fax (207) 985-3102  
 Email info@kkw.org

APPLICATION FOR NEW WATER SERVICE

Date 12-18-2019

OWNER INFORMATION:

Name Town of Ogunquit  
 Address PO Box 875  
 Phone 207-646-9326 Fax \_\_\_\_\_  
 Email ceoogt@townofogunquit.org  
 Signature Scott Heyland

AGENT/CONTRACTOR:

Name Peter Connell / DeStefano Associates  
 Address 2456 LeFayette Rd  
Perth Amherst, NH  
 Phone 603-881-7354 Fax 603-881-0346  
 Email pete@de-stefano-associates.com  
 Signature [Signature]

PROPERTY INFORMATION:

Town Ogunquit Street Address 124 Beach St  
 Property Tax Map 7 Block 132 Lot \_\_\_\_\_  
 Subdivision \_\_\_\_\_ Lot \_\_\_\_\_

TYPE OF SERVICE:

Year round  Seasonal \_\_\_\_\_  
 Commercial Use: Yes  No \_\_\_\_\_

SERVICE SIZE: (Main to gate) 2"  
 SERVICE PIPE: (Street to house)  
 Size 3' Depth 5' Distance 170  
 Material HDPPE

NOTE: IF NEW CONSTRUCTION, PLEASE SUBMIT A COPY OF THE BUILDING PERMIT

THIS PORTION TO BE COMPLETED BY DISTRICT PERSONNEL			
MAIN: Availability: Yes <input checked="" type="checkbox"/> No _____ Deep <input checked="" type="checkbox"/> Surface _____ Size <u>8"</u> Material <u>AC</u>			
SERVICE: Water <input checked="" type="checkbox"/> Fire _____ (Main to Gate) Depth <u>5'</u> Distance _____ Size <u>2"</u> Material <u>CU</u>			
METER: Size <u>2"</u> Location: Basement _____ Box _____ Other _____			
<b>FIELD CHECKLIST:</b> Date / # Bldg. Permit Rec'd _____ Estimate Sent _____ Opening Permit Appl _____ Opening Permit Rec'd _____ Dig Safe Notified _____ Dig Safe Permit # _____ G to H Installed _____	<b>DEPOSITS:</b> Amount Date paid Paid by Meter \$ - <u>NA</u> S.D.C. \$ - <u>NA</u> Service \$ - <u>NA</u> Other \$ <u>672.00</u> <u>TEST, SHORTRUN + SAMPLE</u> TOTAL \$ <u>672.00</u>		
<b>COMMENTS:</b> <u>Acc # 501637</u> <u>Rate 509.589 480</u> <u>UP SIZE SERVICE LINE TO</u> <u>EXISTING ACCOUNT</u>		<b>OFFICE CHECKLIST:</b> Installation Date _____ Work Order # _____ Account # _____ Directory Page # _____ Directory List _____ On Computer _____ Contract Package Sent _____ Service Card Rec'd _____	

B 7/5

Exit 17 Commerce Center  
16 Commerce Way Unit 1  
P.O. Box 907  
Milton, NH 03851  
E-Mail: frizzell@metrocast.net  
**603-652-7800**  
**Fax: 603-652-4700**



GENERAL CONTRACTOR INC.

Concrete  
Foundations  
Concrete Flatwork  
Stamped Concrete  
Site Work  
Demolition  
Aggregates

DeStefano & Associates, Inc.  
2456 Lafayette Road  
Portsmouth, NH 03801-5624

### Additional Work

Job Location  
OGT Main Beach  
Ogunquit, ME

**Date:** 12/4/19      **Invoice #** 1946

REVISION #2      Per CWS 1.1 & S2.1 dated 12-03-19

1) ADDITION WALL & FOOTING REQUIRED:

All Labor and form supplies only to form, install rebar & place concrete.    **ALL MATERIALS BY OTHERS. N.I.C.**

Type 4 on S2.1 will be all type 2 on S2.1

- a) Replace haunch with 240 ft. - addition wall & footing. 6,820.00
- b) Additional Vertical Masonry Dowels at interior per 4 / S2.1 revised 12-3-19 1,812.00  
Rebar & layout by others.

NOTE: If the mason does not layout they can drill them after. We are not responsible for CMU layout.

NET INCREASE COST 8,632.00

NOTE:

- All materials & pumping by others.
- All winter conditions or concrete additives by others.
- No concrete & rebar reinforcement material. N.I.C.    Supplied by others.
- No flatwork included in this proposal.

The following items are NOT INCLUDED in this proposal UNLESS SPECIFIED ABOVE:

( No ) - excavation, site work, grading, shoring, permits, water proofing, damp proofing, insulation, perimeter drains, paving, concrete slab, expansion &/or vapor barrier materials, compaction, compaction &/or concrete testing, all testing, tenting, heating, pumping of concrete or water, winter conditions or additives, No mechanical / No retainage.      Davis Bacon rates or Certified Payroll reports



# Keith Buckovitch Masonry



1 Hartswood Road  
Dover, NH 03820  
Cell (603) 234-9253  
Fax (603) 740-2923  
Stone, Brick & Block Masonry

12/26/19

DeStefano and Associates  
2456 Lafayette Road  
Portsmouth, NH 03801  
Fax: 430-0346  
Attn: John D.

---

Quote for extra masonry work to be done at  
Ogunquit Bath House, Ogunquit, Maine - Construct  
8" X 8" X 16" concrete block wall, 28' 9" long X 8' high -  
dura wall every third course, #5 rebar, vertically,  
grouted solid every 32", bond beam on top course  
with two, #5 rebar, horizontally, grouted solid -  
Labor and material, but not including heater  
enclosure for cold weather work, \$5,344.00 -

Approved & Accepted  
GPD  
12/27/19

Thank you,  
Keith Buckovitch

MAIN BEACH BATHHOUSE

ALEXANDER SUBCONTRACT

PLANS	CATEGORY	ITEM	DETAILS	VALUE
BASE	FRAMING	FRAMING ROOF TRUSSES ROOF SHEATHING INTERIOR WALLS WINDOWS PT AT LIFE GUARD AREA	INCLUDING BLOCKING	\$ 17,500.00
	SIDING	PT PLYWOOD PVC TRIM VINYL SIDING		\$ 10,000.00
	ROOFING	ALL NEW SHINGLES	DEMO STRIPS OLD SIDING TO THE CMU	\$ 5,000.00
	BLOCKING			
ALTERNATE	SCISSOR TRUSS OPTION		DEMO TAKES ALL ROOF FRAMING, SHEATHING & SHINGLES	\$ 9,000.00
				\$ 41,500.00

17,500.00

9,000.00

41,500.00

# Hammond

1) Framing

$$270 + 18,874 + 12,492 + 147$$

31,783 <sup>Roof</sup>

2) Roofing

$$6,178 + 109$$

6,287 <sup>Roof</sup>

3) Trim / Siding  
+ Sills

$$15,652 + 1,457$$

17,109 <sup>Sidin</sup>

4) Int. Ceiling

$$3,314 + 4,756$$

8,070 <sup>Ceilm</sup>

63,429

Quote Total	\$63,244.92
-------------	-------------

Sales Tax Not Included



Hammond Lumber - Portland

300 Riverside Street  
 Portland, Maine 04103  
 (207) 771-8880 Fax: 207-771-8882  
 jwebb@hammondlumber.com

21 LOCATIONS ACROSS MAINE

Auburn • Bangor • Bar Harbor • Belfast • Belgrade • Blue Hill • Boothbay Harbor  
 Brunswick • Bucksport • Calais • Camden • Cherryfield • Damariscotta • Ellsworth  
 Fairfield • Farmington • Greenville • Machias • Portland • Rockland • Skowhegan

www.hammondlumber.com

Prepared For: (1137689)  
 COMM SALES MASTER QUOTE  
 MASTER ONLY USE SUB-JOB ACCOUNTS  
 BELGRADE, ME, 04917

TAKEN BY: JAKE WEBB POR x4808  
 CONTACT: JAKE WEBB POR x4808  
 QUOTE NUMBER: 759195  
 QUOTE NAME: BEACH PER ADDENDUM 3  
 SETUP DATE: 10/17/2019  
 START DATE: 10/17/2019

Estimate

Expiration Date: 10/24/2019

Phone (207) 495-1112

Cell:

Fax:

Email: JWEBB@HAMMONDLUMBER.COM

ITEM	DESCRIPTION	QTY / UOM	PRICE / UOM	EXTENDED	OPTIONS
228BLUE	*** FOUNDATION INSULATION *** BASE BID 2"X2'X8' S/E STYROFOAM 25PSI R10.0	18 EA	15.00 EA	270.00N	
				<b>SECTION TOTAL</b>	270.00 (i)
	*** FRAMING *** BASE BID				
DOWSILL75	FOAM SILL SEALER 7 1/2"X 50' ***THIS IS 7 1/2"***	5 RL	11.49 RL	57.45N	
DOWSILL	FOAM SILL SEALER 5 1/2X50'	1 RL	3.76 RL	3.76N	
248PT	PRESSURE TREATED #1 2X4-8'	102 EA	4.18 EA	426.86N	
2410PT	PRESSURE TREATED #1 2X4-10'	18 EA	5.37 EA	96.64N	
2412PT	PRESSURE TREATED #1 2X4-12'	16 EA	6.57 EA	105.09N	
2416PT	PRESSURE TREATED #1 2X4-16'	4 EA	8.91 EA	35.65N	
2412PT	PRESSURE TREATED #1 2X4-12'	2 EA	6.57 EA	13.14N	
2416PT	PRESSURE TREATED #1 2X4-16'	2 EA	8.92 EA	17.83N	
268PT	PRESSURE TREATED #1 2X6-8'	3 EA	5.60 EA	16.80N	
288PT	PRESSURE TREATED #1 2X8-8'	3 EA	7.26 EA	21.79N	
2812PT	PRESSURE TREATED #1 2X8-12'	2 EA	11.43 EA	22.85N	
2816PT	PRESSURE TREATED #1 2X8-16'	55 EA	14.91 EA	820.19N	
21012PT	PRESSURE TREATED #1 2X10-12'	23 EA	14.14 EA	325.13N	
668PT	PRESSURE TREATED 6X6-8' 1/8	1 EA	19.79 EA	19.79N	
2108KS	2X10-8' K.D. SPF/HF	8 EA	7.44 EA	59.54N	
21010KS	2X10-10' K.D. SPF/HF	45 EA	9.31 EA	418.79N	
21012KS	2X10-12' K.D. SPF/HF	41 EA	10.75 EA	440.62N	
21014KS	2X10-14' K.D. SPF/HF	6 EA	12.54 EA	75.23N	
21016KS	2X10-16' K.D. SPF/HF	50 EA	14.28 EA	714.18N	
21018KS	2X10-18' K.D. SPF/HF 23/18	23 EA	18.06 EA	415.35N	
2128KS	2X12-8' K.D. SPF/HF	1 EA	13.95 EA	13.95N	
21212KS	2X12-12' K.D. SPF/HF	2 EA	21.76 EA	43.51N	
248KS	2X4-8' K.D. SPRUCE 63/8	63 EA	2.22 EA	139.75N	
2410KS	2X4-10' K.D. SPRUCE	29 EA	3.26 EA	94.50N	
2412KS	2X4-12' K.D. SPRUCE	71 EA	3.91 EA	277.41N	
2414KS	2X4-14' K.D. SPRUCE	2 EA	4.62 EA	9.24N	
2416KS	2X4-16' K.D. SPRUCE	45 EA	5.88 EA	264.40N	
268KS	2X6-8' K.D. SPRUCE 2/8	2 EA	3.71 EA	7.41N	

F 2/11

ITEM	DESCRIPTION	QTY / UOM	PRICE / UOM	EXTENDED	OPTIONS
2612KS	2X8-12' K.D. SPRUCE	9 EA	5.99 EA	53.87 N	
2618KS	2X8-16' K.D. SPRUCE	10 EA	8.55 EA	85.53 N	
288KS	2X8-8' K.D. SPRUCE	12 EA	6.67 EA	79.98 N	
2816KS	2X8-16' K.D. SPRUCE	6 EA	11.00 EA	65.98 N	
zz_SOSPR_00842	4 X 4 X 10' SPRUCE	4 EA	59.53 EA	238.12 N	
13KS	1X3 K.D. SPRUCE	2,741 LF	0.18 LF	493.38 N	
12CDX	4X8 1/2" CDX FIR PLYWOOD 15/32"	34 EA	18.98 EA	645.32 N	
34ADV	4X8 3/4" T&G ADVANTECH FLOORING	7 EA	26.98 EA	188.86 N	
34PTCDX	3/4" 4X8 PT PLYWOOD CDX MCA LIFEWOOD	82 EA	31.00 EA	2,542.00 N	
12PTCDX	1/2" 4X8 PT PLYWOOD CDX MCA LIFEWOOD	8 EA	24.10 EA	192.80 N	
58WBA	4X8 5/8" SE OSB PANEL	85 EA	12.00 EA	1,020.00 N	
zz_TJIEWP_32494	LVL 1 3/4 X 9 1/4 2/18' 4/20'	116 LF	4.60 LF	533.86 N	
zz_TJIEWP_32495	LVL 3 1/2 X 11 1/4 X 24'	2 EA	362.73 EA	725.45 N	
zz_TJIEWP_32496	LVL 3 1/2 X 11 7/8 X 22'	1 EA	332.50 EA	332.50 N	
zz_TJIEWP_32497	LVL 3 1/2 X 9 1/4 X 28'	1 EA	336.64 EA	336.64 N	
zz_TJIEWP_32498	LVL 5 1/4 X 9 1/4 1/8' 1/14' 1/16'	38 LF	18.05 LF	685.73 N	
zz_TJIEWP_32499	ROOF TRUSSES MAINE BID	1 EA	3,279.59 EA	3,279.59 N	
A34Z	A34Z ZMAX FRAMING ANGLE SIMPSON 100/BOX	4 EA	0.81 EA	3.24 N	
BC6Z	BC6Z ZMAXX 6X6 POST CAP/BASE 10/BOX SIMPSON	1 EA	17.59 EA	17.59 N	
H25	H2.5A RAFTER TIE 100/BOX SIMPSON	39 EA	0.41 EA	15.99 N	
H25	H2.5A RAFTER TIE 100/BOX SIMPSON	22 EA	0.41 EA	9.02 N	
zz_SOSIMP_19663	SIMPSON H3 Z-MAX	57 EA	0.68 EA	38.58 N	
zz_SOSIMP_19664	HDU4-SDS2.5	4 EA	24.31 EA	97.23 N	
zz_SOSIMP_19665	SIMPSON HGA10	52 EA	0.00 EA	0.00 N	
LRU28Z	LRU28Z 2X8 ZMAX SLOPED RAFTER HANGER 25/BOX	25 EA	5.50 EA	137.50 N	
LS50Z	LS50Z ZMAX REINFORCING ANGLE 50/BOX SIMPSON	4 EA	2.20 EA	8.80 N	
LSSJ28LZ	2X8 ZMAX LSSJ28LZ ADJUSTABLE SKEWABLE LEFT HANGER SIMPSON 25/BOX	92 EA	13.19 EA	1,213.48 N	
zz_SOSIMP_19666	SIMPSON LSSUI25	6 EA	10.77 EA	64.62 N	
zz_SOSIMP_19667	SIMPSON LU28	11 EA	0.93 EA	10.23 N	
LUS28Z2	DOUBLE 2X8 ZMAX LUS28-2Z JOIST HANGER FACE MOUNT 25/BOX	4 EA	2.35 EA	9.40 N	
zz_SOSIMP_19668	SIMPSON PC4Z	4 EA	16.27 EA	65.08 N	
zz_SOSIMP_19669	SIMPSON PC6Z	1 EA	26.47 EA	26.47 N	
zz_SOSIMP_19670	SIMPSON TC26 Z-MAX	25 EA	8.25 EA	206.25 N	
zz_SOSIMP_19671	SIMPSON U210-3	1 EA	12.31 EA	12.31 N	
0475PLUS	VYCOR PLUS BY GRACE 4"X75' SELF ADHERED FLASHING	3 RL	20.99 RL	62.97 N	
0975PLUS	VYCOR PLUS BY GRACE 9"X 75' SELF ADHERED FLASHING	1 RL	32.00 RL	32.00 N	
9TYPAR	9'X100' TYPAR BARRIER SHEETING	3 RL	115.00 RL	345.00 N	
TAPETYVEK	2"X55 YARDS DUPONT TYVEK TAPE DUPONT TYVEK 36/BOX	3 RL	12.98 RL	38.94 N	
				<b>SECTION TOTAL</b>	18,871.16
	<b>*** EXTERIOR TRIM AND SIDING ***</b>				
11018AZEK	1X10-18' S4S WHITE AZEK CELLULAR PVC BOARD ONLY USE 100% ACRYLIC LATEX PAINT WITH A LIGHT REFLECTIVE VALUE OF 55 OR HIGHER.	3 EA	59.11 EA	177.33 N	
11218AZEK	1X12-18' S4S WHITE AZEK CELLULAR PVC BOARD ONLY USE 100% ACRYLIC LATEX PAINT WITH A LIGHT REFLECTIVE VALUE OF 55 OR HIGHER.	5 EA	72.06 EA	360.28 N	
zz_AZEKTRIM_04315	1 X 16 X 18' AZEK	3 EA	111.93 EA	335.80 N	
1318AZEK	1X3-18' S4S WHITE AZEK CELLULAR PVC BOARD ONLY USE 100% ACRYLIC LATEX PAINT WITH A LIGHT REFLECTIVE VALUE OF 55 OR HIGHER.	8 EA	17.49 EA	139.92 N	
1418AZEK	1X4-18' S4S WHITE AZEK CELLULAR PVC BOARD ONLY USE 100% ACRYLIC LATEX PAINT WITH A LIGHT REFLECTIVE VALUE OF 55 OR HIGHER.	3 EA	23.19 EA	69.57 N	
1618AZEK	1X6-18' S4S WHITE AZEK CELLULAR PVC BOARD	28 EA	36.88 EA	1,032.58 N	

ITEM	DESCRIPTION	QTY / UOM	PRICE / UOM	EXTENDED	OPTIONS
1418AZEK	ONLY USE 100% ACRYLIC LATEX PAINT WITH A LIGHT REFLECTIVE VALUE OF 55 OR HIGHER. 1X4-18' S4S WHITE AZEK CELLULAR PVC BOARD	12 EA	23.19 EA	278.28N	
54420AZEK	ONLY USE 100% ACRYLIC LATEX PAINT WITH A LIGHT REFLECTIVE VALUE OF 55 OR HIGHER. 5/4X4-20' S4S WHITE AZEK CELLULAR PVC BOARD	2 EA	34.24 EA	68.48N	
54420AZEK	ONLY USE 100% ACRYLIC LATEX PAINT WITH A LIGHT REFLECTIVE VALUE OF 55 OR HIGHER. 5/4X4-20' S4S WHITE AZEK CELLULAR PVC BOARD	4 EA	34.24 EA	136.95N	
54520AZEK	ONLY USE 100% ACRYLIC LATEX PAINT WITH A LIGHT REFLECTIVE VALUE OF 55 OR HIGHER. 5/4X5-20' S4S WHITE AZEK CELLULAR PVC BOARD	3 EA	42.98 EA	128.94N	
54620AZEK	ONLY USE 100% ACRYLIC LATEX PAINT WITH A LIGHT REFLECTIVE VALUE OF 55 OR HIGHER. 5/4X8-20' S4S WHITE AZEK CELLULAR PVC BOARD	16 EA	57.28 EA	916.53N	
54420AZEK	ONLY USE 100% ACRYLIC LATEX PAINT WITH A LIGHT REFLECTIVE VALUE OF 55 OR HIGHER. 5/4X4-20' S4S WHITE AZEK CELLULAR PVC BOARD	8 EA	34.24 EA	273.91N	
1251218ECB	ONLY USE 100% ACRYLIC LATEX PAINT WITH A LIGHT REFLECTIVE VALUE OF 55 OR HIGHER. 1/2X5 1/2-18' WHITE AZEK EDGE & CENTER BEAD CELLULAR PVC	84 EA	39.45 EA	3,314.17N	(4)
16ECBPRE	ONLY USE 100% ACRYLIC LATEX PAINT WITH A LIGHT REFLECTIVE VALUE OF 55 OR HIGHER. 1X6 EDGE & CTR BEAD KNTY PINE	6,606 LF	0.72 LF	4,756.32N	(4)
AZM105	3/4X3/4X16' AZEK QUARTER ROUND AZM-105	13 EA	9.58 EA	124.53N	
54418JCAZEK	5/4X4-18' WHITE RABBETED J-CHANNEL AZEK PVC BOARD AZ131218R	40 EA	39.99 EA	1,599.55N	
zz_AZEKTRIM_04317	5/4 X 6 X 18' AZEK RABBET 1 EDGE	11 EA	69.13 EA	760.38N	
zz_AZEKTRIM_04318	5/4 X 6 X 18' AZEK SKIRT BOARD	15 EA	82.24 EA	1,233.58N	
zz_AZEKTRIM_04319	5/4 X 6 X 18' AZEK RABBET 1 EDGE	3 EA	69.13 EA	207.38N	
110WHPBF	1"X10' WHITE PREBENT FLASHING	4 EA	2.79 EA	11.16N	
8GDE	8"X10' GALV DRIP EDGE STD 20/BOX	15 EA	6.29 EA	94.35N	
12WAF	12"X50' WHT/ROYAL BRN PAINTED ALUM REVERSIBLE COIL STOCK **DO NOT ALLOW CONTACT WITH TREATED LUMBER**	2 RL	59.79 RL	119.58N	
AST	10' ALUMINUM STARTER STRIP FOR VINYL SIDING 50PC/BOX	29 PC	4.50 PC	130.50N	
zz_SOVINYL_23738	VINYL SHINGLE SIDING D7 CEDAR SPECTRUM	25 SQ	298.08 SQ	7,452.00N	
				<b>SECTION TOTAL</b>	23,722.07
*** ROOFING MATERIALS ***					
8GDE	8"X10' GALV DRIP EDGE STD 20/BOX	30 EA	6.29 EA	188.70N	
AIWS	GRACE 225 SF ICE AND WATERSHIELD 3' X 75' ROLL	14 RL	136.00 RL	1,904.00N	
57SF	5"X7" ALUM STEP FLASHING	26 EA	0.19 EA	4.94N	
FP	15# FELT PAPER 432 SQ/FT ROLL. RATED ASTM 4869	4 RL	16.49 RL	65.96N	
CTLWPW	CT LANDMARK LIFETIME 3 BDL/SQ PEWTERWOOD	116 BDL	29.49 BDL	3,420.84N	
CTHRLMPW	CT LANDMARK SHADOW RIDGE AR PEWTERWOOD H&R CAP 30 LF/BDL	7 BDL	52.95 BDL	370.65N	
ROLL50	50' COBRA ROLL VENT - NAIL GUNABLE ***THIS IS 50'***	2 RL	111.38 RL	222.76N	
				<b>SECTION TOTAL</b>	6,177.85 (2)
*** ALTERNATE 2 ***					
DOWSILL	FOAM SILL SEALER 5 1/2X50'	2 RL	3.76 RL	7.52N	
2616PT	PRESSURE TREATED #1 2X6-16'	7 EA	11.53 EA	80.73N	
21014KS	2X10-14' K.D. SPF/HF	4 EA	12.54 EA	50.15N	
2128KS	2X12-8' K.D. SPF/HF	1 EA	13.95 EA	13.95N	
2412KS	2X4-12' K.D. SPRUCE	12 EA	3.91 EA	46.89N	
2416KS	2X4-16' K.D. SPRUCE	15 EA	5.88 EA	88.14N	
268KS	2X6-8' K.D. SPRUCE 12/8	12 EA	3.70 EA	44.45N	
2610KS	2X6-10' K.D. SPRUCE	35 EA	5.29 EA	185.01N	

41

ITEM	DESCRIPTION	QTY / UOM	PRICE / UOM	EXTENDED	OPTIONS
	35/10				
2612KS	2X6-12' K.D. SPRUCE	13 EA	5.99 EA	77.82N	
2616KS	2X6-16' K.D. SPRUCE	1 EA	8.56 EA	8.56N	
288KS	2X8-8' K.D. SPRUCE	4 EA	6.67 EA	26.66N	
2812KS	2X8-12' K.D. SPRUCE	15 EA	8.04 EA	120.62N	
34PTCDX	3/4" 4X8 PT PLYWOOD CDX MCA LIFEWOOD	7 EA	31.00 EA	217.00N	
58ADV	4X8 5/8" SQ EDGE ADVANTECH SHEATHING	51 EA	31.50 EA	1,606.50N	
zz_TJIEWP_32500	ALTERNATE 2 TRUSSES	1 EA	8,853.41 EA	8,853.41N	
A34Z	A34Z ZMAX FRAMING ANGLE SIMPSON 100/BOX	4 EA	0.81 EA	3.24N	
H25	H2.5A RAFTER TIE 100/BOX SIMPSON	29 EA	0.41 EA	11.89N	
zz_SOSIMP_19672	SIMPSON HUC26-3	8 EA	16.99 EA	135.92N	
LS50Z	LS50Z ZMAX REINFORCING ANGLE 50/BOX SIMPSON	4 EA	2.20 EA	8.80N	
LSSJ28LZ	2X8 ZMAX LSSJ28LZ ADJUSTABLE SKEWABLE LEFT HANGER SIMPSON 25/BOX	27 EA	13.19 EA	356.13N	
LUS262Z	DOUBLE 2X6 ZMAX LUS26-2Z JOIST HANGER FACE MOUNT 25/BOX	114 EA	1.85 EA	210.90N	
zz_SOSIMP_19673	SIMPSON TC25 Z-MAX	38 EA	8.25 EA	313.50N	
zz_SOSIMP_19674	SIMPSON THJA26	1 EA	24.24 EA	24.24N	
				<b>SECTION TOTAL</b>	12,492.03 (1)
	<b>*** EXTERIOR TRIM AND SIDING ***</b>				
1618AZEK	1X6-18' S4S WHITE AZEK CELLULAR PVC BOARD ONLY USE 100% ACRYLIC LATEX PAINT WITH A LIGHT REFLECTIVE VALUE OF 55 OR HIGHER.	6 EA	36.88 EA	221.28N	
1318AZEK	1X3-18' S4S WHITE AZEK CELLULAR PVC BOARD ONLY USE 100% ACRYLIC LATEX PAINT WITH A LIGHT REFLECTIVE VALUE OF 55 OR HIGHER.	3 EA	17.49 EA	52.47N	
zz_AZEKTRIM_04320	5/4 X 6 X 18' AZEK RABBET 1 EDGE	3 EA	69.13 EA	207.39N	
zz_AZEKTRIM_04321	5/4 X 6 X 18' AZEK RABBET 1 EDGE	3 EA	69.13 EA	207.39N	
CTXTCOL234AZ250	CORTEX AZEK TRIM COLLATED PLUG WHITE TRADITIONAL W/ 2-3/4" SCREW 250LF FMCTXTCL234-AZ2TD / ATCTC250LF275	1 BOX	117.69 BOX	117.69N	
CTXTAZ50	CORTEX AZEK TRIM PLUG WHITE TRADITIONAL W/ 2" SCREW 50LF FMCTXT AZ50TD / ATCTL50LF200	1 BOX	24.99 BOX	24.99N	
110WHPBF	1"X10' WHITE PREBENT FLASHING	4 EA	2.79 EA	11.16N	
zz_SOVINYL_23739	VINYL SHINGLE SIDING CEDAR SPECTRUM D7	2 SQ	298.08 SQ	596.16N	
AST	10' ALUMINUM STARTER STRIP FOR VINYL SIDING 50PC/BOX	4 PC	4.50 PC	18.00N	
				<b>SECTION TOTAL</b>	1,456.53 (3)
	<b>*** ROOFING-ADD/DEDUCT FROM BASE BID ROOFING LIST ***</b>				
8GDE	8"X10' GALV DRIP EDGE STD 20/BOX	1 EA	6.29 EA	6.29N	
	DEDUCT- ICE AND WATER SHIELD 3' X 75' 2 ROLLS				
57SF	5"X7" ALUM STEP FLASHING	18 EA	0.19 EA	3.42N	
FP	15# FELT PAPER 432 SQ/FT ROLL. RATED ASTM 4869	1 RL	16.49 RL	16.49N	
CTLWPW	CT LANDMARK LIFETIME 3 BDL/SQ PEWTERWOOD	1 BDL	29.49 BDL	29.49N	
	DEDUCT- RIDGE VENT -4 LIN FEET				
CTHRLMPW	CT LANDMARK SHADOW RIDGE AR PEWTERWOOD H&R CAP 30 LF/BDL	1 BDL	52.95 BDL	52.95N	
				<b>SECTION TOTAL</b>	108.64 (2)
	<b>*** ALTERNATE 3 ***</b>				
21012KS	2X10-12' K.D. SPF/HF	4 EA	10.75 EA	42.99N	
268KS	2X6-8' K.D. SPRUCE	10 EA	3.71 EA	37.05N	
	10/8				
LUS262Z	DOUBLE 2X6 ZMAX LUS26-2Z JOIST HANGER FACE MOUNT 25/BOX	36 EA	1.85 EA	66.60N	
				<b>SECTION TOTAL</b>	146.64 (1)

**\*\*\*\*\* TERMS OF ESTIMATE \*\*\*\*\***

Upon request, your Hammond Lumber Company salesperson will provide an updated quotation after the estimate date has expired.

Due to various methods of construction and building practices, we recommend that you supply your own material list to be priced. Material lists created by Hammond Lumber represent only our best estimate of the required quantities needed to complete your project. Hammond Lumber Company assumes no responsibility for the accuracy of the quantities.

Some materials contained in this estimate may be used to meet the standard MUBEC code requirements. It is the responsibility of the owner/builder to check with the local code official to ensure proper compliance to the established codes.

If allowance figures have been used in this estimate, they represent approximate costs based only on past experience with similar projects. Hammond Lumber Company assumes no responsibility for the accuracy of allowance estimates.

Spruce items priced out by the LF in the quote include 10', 12', 14' & 16' lengths only.

Pine items priced out by the LF in the quote include 6', 8', 10', 12', 14' & 16' lengths only.

Line items that are marked "options" are not included in the subtotals of the estimate.

**\*\*\*\*\* KITCHEN & BATH \*\*\*\*\***

Since 1969, Hammond Lumber Company has designed kitchen and baths for homeowners. We offer the largest kitchen/bath showroom in the state - featuring over 70 display kitchens. We recommend that you meet with one of our designers and turn your ideas into a three-dimensional drawing using our state of the art 20/20 computer design system.

Hammond Lumber Company can special order over eighteen cabinetry lines including (but not limited to) the following high quality lines such as OMEGA/DYNASTY, KRAFTMAID, CANDLELIGHT, HOMECREST, SCHROCK, MERILAT, BROOKHAVEN and WOOD MODE as well as a selection of fine line bath cabinetry.

We offer Wolf Cabinetry, kitchen cabinets, vanities and vanity tops in quick ship programs, usually one week or less. Hammond Lumber Company has available Moen and Danze kitchen, bath and shower faucets. Twenty-four hour delivery is guaranteed on all IN-STOCK cabinetry, vanities, countertops and hardwood flooring.

In Portland see Alan Paonessa or Sarah Tanguay, or Kayla Bear, Elisa Cintron or call them at 1-888-439-7853.

**\*\*\*\*\* FLOORING \*\*\*\*\***

Hammond Lumber Company offers a complete line of flooring to meet all of your needs.

We stock unfinished red oak and pre-finished white oak.

We are an exclusive Home Foundations distributor of Shaw Carpet. We offer hundreds of colors in Saxony, Textures, Multi-Colors, Berbers and Commercial.

We offer Congoleum, Armstrong, Tarkett and Mannington vinyl floors in all the latest colors and styles. In wood, we carry Hartco, Mannington, unfinished strip, engineered and prefinished. We offer Uniclic-Quickstep, Pergo, Formica, Wilsonart and Mannington laminated floor systems.

Ceramic tile from Marazzi, Dal-tile, American Olean, Arte, Florida, Florim, Granite and Marble tile.

Hammond Lumber Company offers free room measurements, estimates and guarantees our professional installation.

In Portland see Alan Paonessa, Sarah Tanguay, or Kayla Bear, or call them at 1-888-439-7853.

Ogunquit Bathhouse Main Beach  
December 13, 2019

**Consolidated Materials List**

Plans by CWS Architects dated 9/25/19 with Addendum 1 & 2  
Changes by Addendum 3  
List includes 3 Alternates

Item #	Description	Quantity/Length												Other-Net		
		8	10	12	14	16	18	20	22	24	Qty	UoM				
1	<b>WOOD SPEC:</b>															
2	Framing lumber to be SPF No.2 or better, NLGA, KD or seasoned to 19% Max. moisture content															
3																
4	<b>NOTES:</b>															
5	List does not include anchor bolts, threaded rods, fasteners, etc.															
10	Max moisture content for PT items to be 19% for lumber, 15% for plywood.															
11	The only interior trim listed is the PVC ceilings and window trim, and FRP. Remaining interior trim materials to be by others.															
12	Items not found in Structural and Architectural drawings provided are not included.															
13																
14	<b>BASE BID</b>															
15	<b>FOUNDATION INSULATION:</b>															
16	2" rigid insulation 2' x 8' sheet; ASTM C 578 type VI															18 sheets
17																
18	<b>FRAMING:</b>															
19	8" sill seal x 50' roll															5 rolls
20	4" sill seal x 50' roll															1 rolls
21	2 x 4 PT KDAT	214	18	25	2	4										
22	2 x 4 PT KDAT			2		2										
23	2 x 6 PT KDAT	3														
24	2 x 8 PT KDAT	3	0													
25	2 x 10 PT KDAT			23												
26	6 x 6 PT KDAT	1														
27	2 x 10 KD SPF No.2 or better, NLGA	8	45	41	8	62	29									
28	2 x 12 KD SPF No.2 or better, NLGA	1		2												
29	2 x 14 KD SPF No.2 or better, NLGA					3										
30	2 x 4 KD SPF No.2 or better, NLGA	63	29	71	2	45										
31	2 x 6 KD SPF No.2 or better, NLGA	2		9		10										
32	2 x 8 KD SPF No.2 or better, NLGA	12				6										
33	4 x 4 S4S SPF No.2 or better, NLGA		1													
33.1	6 x 6 S4S SPF No.2 or better, NLGA			2												
34	1 x 3 strapping														2741 lin feet	
35	1/2" CDX or OSB														36 sheets	
36	3/4" T&G floor sheathing, plywood or OSB														7 sheets	
37	3/4" PT plywood KDAT														82 sheets	
38	3/8" PT plywood KDAT														8 sheets	

F 7/1

List includes 3 Alternates		Quantity/Length											Other-Net	
	Description	8	10	12	14	16	18	20	22	24			Qty	UoM
39	5/8" roof sheathing plywood or OSB												85	sheets
40	LVL 1-3/4 x 9-1/4						2	4						
41	LVL 3-1/2 x 11-1/4								0					
42	LVL 3-1/2 x 11-7/8							1 0						
43	LVL 3-1/2 x 9-1/4 x 28' long												1	each
44	LVL 5-1/4 x 9-1/4	1												
44.1	LVL 5-1/4 x 11-7/8									2				
45	roof trusses												1	set
46	Simpson A34												4	each
46.1	Simpson AC4												1	each
46.2	Simpson AC6												1	each
47	Simpson BC6Z												1	each
48	Simpson H2.5												39	each
49	Simpson H2.5A												22	each
50	Simpson H3 Z-Max												57	each
51	Simpson HDU4-SDS2.5												4	each
52	Simpson HGA10 - number of pieces												60	each
53	Simpson LRU28Z												25	each
54	Simpson LSS0												4	each
55	Simpson LSSJ28R/LZ												92	each
56	Simpson LSSU125												6	each
57	Simpson LU28												11	each
58	Simpson LUS28-2												4	each
59	Simpson PC4Z												4	each
60	Simpson PC6Z												5	each
61	Simpson TC26 Z-Max												25	each
62	Simpson U210-3												1	each
63	4" Vycor x 75' roll												3	rolls
64	9" Vycor x 75' roll												1	rolls
64.1	12" Vycor x 75' roll												1	rolls
65	Tyvek or equal, 900 sf roll												3	rolls
66	Tape for Tyvek or equal												3	rolls
67														
68	<b>EXTERIOR TRIM &amp; SIDING: Plans &amp; Finish Schedule show Azek or equal, spec's show Versatex or equal</b>													
69	1 x 10 PVC												51	lin feet
70	1 x 12 PVC												84	lin feet
71	1 x 16 PVC												51	lin feet
71.1	1 x 2 PVC												84	lin feet
72	1 x 3 PVC												51	lin feet
73	1 x 4 PVC												51	lin feet
74	1 x 6 PVC												596	lin feet
75	1/2 x 4 PVC												212	lin feet

List Includes 3 Alternates

	Description	Quantity/Length												Other-Net	
		8	10	12	14	16	18	20	22	24	Qty	UoM			
76	5/4 x 2 PVC													39	lin feet
77	5/4 x 3 PVC													73	lin feet
78	5/4 x 5 PVC													51	lin feet
79	5/4 x 6 PVC													260	lin feet
80	6/4 x 4 PVC													147	lin feet
81	1/2" x 5-1/2" PVC beadboard													1340	lin feet
81.1	1 x 6 T&G wood													6606	lin feet
82	3/4" 1/4 round trim					4								200	lin feet
83	5/4 x 12 PVC rabbet 1 edge													703	lin feet
84	5/4 x 4 PVC rabbet 1 edge													204	lin feet
85	5/4 x 6 PVC rabbet 1 edge													260	lin feet
86	5/4 x 6 PVC universal skirt board with integral nailing flange and drip edge overhang													37	lin feet
87	5/4 x 6 PVC, rabbet 1 edge													3400	each
88	Cortex fasteners													33	lin feet
89	1" drip cap													141	lin feet
90	2-1/2" drip cap													2	rolls
91	12" coil stock x 50' roll													284	lin feet
92	shingle siding starter strip													24	square
93	vinyl shingle siding - Mastic Cedar Discovery Perfection shingle, triple 5", color - Harbor Grey														
94															
95	<b>VINYL WINDOWS: No Spec found, plans show Alside 1904 series or equal</b>														
96	window type A													9	each
96.1	window type A2													2	each
97	window type B													1	each
98	window type C													4	each
99															
100	<b>ROOFING MATERIALS:</b>														
101	drip edge - .022" thick, prefinished white													295	lin feet
102	ice & water shield 3' x 75' roll													14	rolls
103	step flashing													15	lin feet
104	15# felt x 432 sf roll													4	rolls
105	asphalt shingles - Pelican Bay Cape Cod 5" shingle													38	square
106	ridge vent													92	lin feet
107	hip and ridge shingles													200	lin feet
107.1															
107.2	<b>INTERIOR TRIM MATERIALS:</b>														
107.3	1 x 3 PVC													176	lin feet
107.4	1 x 4 PVC													926	lin feet
107.5	1 x 5 PVC													176	lin feet
107.6	3/4" PVC quarter round trim													850	lin feet
107.7															
107.8	<b>FRP:</b>														

2/21

List includes 3 Alternates		Quantity/Length											Other-Net
	Description	8	10	12	14	16	18	20	22	24		Qty	UoM
107.9	FRP 4' x 8' sheet - Crane or equal, Class A, linen finish LBALN, with Kemlite Surfaseal surface protection											15	sheets
107.1	FRP Adhesive											10	gallons
107.11	FRP trim - lf											232	lin feet
107.12	FRP rivets											500	each
111													
112													
113	6" sill seal x 50' roll											2	
114	2 x 6 PT KDAT											7	
115	2 x 10 KD SPF No.2 or better, NLGA											4	
116	2 x 12 KD SPF No.2 or better, NLGA	1											
117	2 x 4 KD SPF No.2 or better, NLGA											15	
118	2 x 6 KD SPF No.2 or better, NLGA		12	35								1	
119	2 x 8 KD SPF No.2 or better, NLGA											15	
120	3/4" PT plywood												7 sheets
121	5/8" roof sheathing												51 sheets
122	Alternate 2 Trusses												1 set
123	Simpson A34												4 each
124	Simpson H2.5A												29 each
125	Simpson HUC26-3												8 each
126	Simpson LS50												4 each
127	Simpson LSSJ28LRZ												27 each
128	Simpson LUS26-2												114 each
129	Simpson TC26 Z-Max												38 each
130	Simpson THJA26												1 each
131													
132	<b>EXTERIOR TRIM &amp; SIDING: Plans show Azek or equal, spec's show Versatex or equal</b>												
133	1 x 6 PVC												101 lin feet
134	1 x 3 PVC												51 lin feet
135	5/4 x 6 PVC rabbet 1 edge												51 lin feet
136	5/4 x 6 PVC, rabbet 1 edge												37 lin feet
136.1	1/2" x 5-1/2" PVC beadboard												130 lin feet
137	cortex fasteners												432 lin feet
138	1" drip cap												33 lin feet
139	vinyl shingle siding - product not identified - listed square												2 square
140	shingle siding starter strip												35 lin feet
141													
142	<b>ROOFING - ADD/DEDUCT FROM BASE BID ROOFING LIST</b>												
143	drip edge												9 lin feet
144	DEDUCT - ice & water shield 3' x 75' roll												-2 rolls
145	step flashing												10 lin feet
146	15# felt x 432 sf roll												1 rolls
147	asphalt shingles												0.25 square

Item #	Description	Quantity/Length												Other-Net			
		8	10	12	14	16	18	20	22	24	Qty	UoM					
148	DEDUCT - ridge vent																
149	hip and ridge shingles																-4 lin feet
150																	15 lin feet
151	<b>ALTERNATE 3:</b>																
152	2 x 10 KD SPF No.2 or better, NLGA					4											
153	2 x 6 KD SPF No.2 or better, NLGA	10															
154	Simpson LUS26-2																36 each
155	"Solatube" Brighten Up 160 DS Series, 10" Daylighting System for hard ceilings, with square "Just Frost" diffuser, daylight dimmer, and integral lighting fixture																9 each
157	Solatube extension tubes for above x 7'-6" long																3 each
158	Solatube extension tubes for above x 10'-6" long																3 each
159	Solatube extension tubes for above x 4'-6" long																3 each
160																	
161																	
162																	
163																	
164																	
165																	
166																	
167																	
168																	
169																	
170																	
171																	
172																	
173																	
174																	
175																	
176																	
177																	
178																	
179																	
180																	
181																	
182																	
183																	
184																	
185																	
186																	
187																	
188																	
189																	

1/11/17

# PURCHASE ORDER



**DeStefano & Associates, Inc.**  
 PLANNING • DESIGN • CONSTRUCTION

Phone 603.430.0339  
 Fax 603.430.0346  
 2456 Lafayette Road, Suite 3  
 Portsmouth, NH 03801

<b>Project Name:</b> Main Beach Bathhouse Renovations 124 Beach Street, Ogunquit, ME 03907		<b>Trade:</b> Solatube	<b>Date:</b> 12/23/2019
<b>Vendor:</b> Willco Sales & Service, Inc. 18 King Street Stratford, CT 06615  <b>Contact Name:</b> Angela Hudson <b>Phone No./Email:</b> 203-767-1270 ah@willcosales.com		<b>Ship To:</b> Peter Connell 124 Beach Street Ogunquit, ME 03907  <b>Contact Name:</b> Peter Connell <b>Phone No./Email:</b> 603-520-7354 peterc@destefano-associates.com	
<b>Terms:</b> NET 30, unless noted otherwise		<b>Conditions:</b> The Vendor, by accepting this order, whether in writing, verbally, or by cause of conduct, agrees to the terms and conditions on <u>page two</u> of this order.	

<b>Per Quote Date:</b> 12/10/2019				
Item	QTY	Description	Unit Price	Amount
		Solatube Tubular Daylighting Device		
<b>Notes:</b> Certificate of Insurance required from Vendor prior to shipment and payment. Reference DAI Insurance Requirements.			<b>Subtotal</b>	\$3,553.57
			<b>Sale Tax ( %)</b>	\$0.00
			<b>Total</b>	\$3,553.57
<b>Referenced Documents:</b> Quote dated 12/10/2019				
<b>Drawing/Specification:</b> N/A			<b>Schedule:</b> N/A	
<b>Supplemental Conditions:</b> Safety Conditions			<b>Shop Drawings by:</b> N/A	
<b>Payment Instructions Dated:</b> 02/04/2019			<b>Delivery to Site After DAI Approval:</b> Per Site Manager	
<b>Other:</b> Certificate of Insurance			<b>Completion of Work:</b> TBD	
<b>Verbal Order Agreed by:</b> John DeStefano			<b>Date:</b> 12/23/2019	
Agreed & Accepted				
<b>Purchaser:</b> John DeStefano _____  <b>Title:</b> Project Manager _____			<b>Vendor:</b> <i>Laura J. Walker, CEO</i> _____  <b>Title:</b> _____	

6 1/2



# CONFIRMING ORDER

PLEASE SIGN AND RETURN ONE COPY

TO: Destefano & Associates  
Attention: Peter Connell, peterc@destefano-associates.com

DATE: 12/10/2019  
RE: Ogunquit Main Beach Bath House  
Ogunquit, ME

Portsmouth, NH 03801-

ARCHITECT: CWS Architects  
SECTION: Tubular Daylighting Device

Dear Peter: Thank you for your valued order!

Job #

We will Deliver Only the following items according to the terms and conditions stated herein:

### Order Details

#### SOLATUBE TUBULAR DAYLIGHTING DEVICE

NINE (9) MODEL 160 DS-DAI-FP-FI-E3-L1-LN-I  
EACH CONSISTS OF:

- 160 DS STARTER KIT
- 160 DS DOME SHOCK INNER
- 160 DS FLASHING PITCHED ROOFING SEALANT
- 160 DS EXT TUBE 24' LENGTH (3)
- SCREW KIT TUBE PACK OF 4
- TAPE FOIL 2"X6' ROLL
- 160 DS NATURAL EFFECT LENS
- 160 DS FLAHSING INSULATOR
- 160 DS DIFFUSER CLASSIC OPTIVIEW

GRAND TOTAL      \$3,553.57  
Tax Exempt


INSURANCE Coverage: Willco Sales Service, Inc. standard insurance coverage and blanket endorsement CG D2 46 apply. Additional policies or coverage are not included. BOND: Add 3% to contract total.

**Excluded**      Unloading and Carry-In; Inspection; Freight Damage; Installation;

Above price is good for 30 days from date of quote. Payments for goods and services are due upon completion of work unless otherwise specified. Interest shall be added at the rate of 1.5% per month on the unpaid balance of any account past due. Purchaser shall pay all costs of collections, including a reasonable attorney's fee, on any accounts past due.

Willco Sales & Service, Inc.

BY: \_\_\_\_\_  
Angela Hudson  
Scott Tague, V.P. Sales

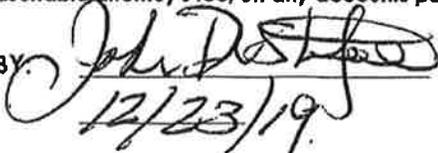ACCEPTED BY:   
DATE: 12/23/19

# PROPOSAL

WINNICUT DOOR CO., LLC  
10 LANE RD  
RAYMOND, NH 03077  
PHONE: 603-674-1581  
EMAIL: randy@winnicut.com



<b>PROJECT: OGUNQUIT BATHHOUSES</b> MAIN BEACH OGUNQUIT, ME 03907	<b>CONTRACTOR: DESTEFANO AND ASSOCIATES</b> 2456 LAFAYETTE RD PORTSMOUTH, NH 03801
---	--

ESTIMATOR: RANDY FISHER

DATE: 12/10/19

HOLLOW METAL - (15) WELDED HM FRAMES, PRIMED FINISH AND PREPPED FOR HARDWARE (PREFINISH NOT AVAILABLE) THERMALLY-BROKEN AT EXTERIOR; (17) LEAVES OF HM DOORS, PRIMED FINISH AND PREPPED FOR HARDWARE (PREFINISH NOT AVAILABLE). ALL MATERIAL A60 GALVANNEALED. EXTERIOR DOORS TO HAVE TOP CAPS. GLASS IS BY OTHERS. <i>curries excluded prefinish</i>	<b>14,384.00</b>
WOOD DOORS - NOT IN SCOPE.	-
FINISH HARDWARE - INCLUDES HINGES, SCHLAGE MORTISE LOCKS, LCN CLOSERS, HAGER HINGES, REESE WEATHERSTRIP, AND MISCELLANEOUS FLAT GOODS, STOPS, SILENCERS, ETC. AS REQUIRED.	<b>15,724.00</b>
DIVISION 10 - UNDER SEPARATE COVER.	-
LABOR TO INSTALL DOORS AND HARDWARE AS PER PLANS AND SPECS. INSTALLATION OF WELDED HM FRAMES BY OTHERS.	<b>3,483.00</b>
<b>TOTAL PROPOSAL:</b>	<b>33,591.00</b>

EXCLUSIONS: ALL WIRING BY OTHERS. ALL MATERIALS AND LABOR AT ALUMINUM ENTRANCES (IF ANY) BY OTHERS. ALL ACCESS CONTROL, INCLUDING CARD READERS, POWER SUPPLIES, AND ALL WIRING, BY OTHERS.

COMMENTS:

Approved: 

Print Name: John Destefano  
Date: 12/16/19

Sales Person:



Customer Acknowledgement
Quote Date 12/19/2019
Date Ordered Quote Not Ordered

Dealer Name:

424970 DESTEFANO & ASSOCIATES INC -

note: all masonry openings shall have continuous 2x PT wood buck at head, jambs, & sill, resulting in R.O.'s as noted within

Bill To:  
DESTEFANO & ASSOCIATES INC -  
2456 LAFAYETTE RD  
PORTSMOUTH, NH 03801

Ship To:  
SAME

Order Notes:


Delivery Notes:

Phone: (603) 430-0339 Fax:  
Quote Name: Project Name:  
Ogunquit Bath Houses Ogunquit Bath Houses

QUOTE #	RUSH	STATUS	PO#
2444485	No	None	

Line Item #	Qty	Width x Height	UI	Description	Net Price	Extended
1	11	28.875" X 16.375"	46		\$119.68	\$1,316.48

1914-1900 Series 28.875 x 16.375  
DH Integral Brickmould J-channel 1" Nailfin Setback  
Frame Color = White  
CLIMATECH, DS / 3/16, OBSCURE FULL  
U-Factor = 0.27, CR = 61, SHGC = 0.33, VT = 0.61, CPD  
= ASO-A-121-00037-00001  
Exterior Casing = No Exterior Casing, No Jamb Extension,  
Frame Size

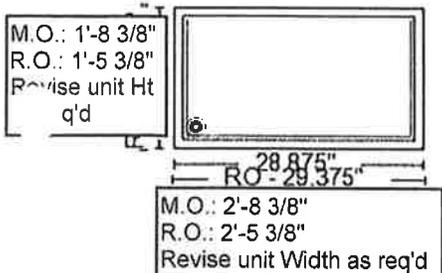


Line Item Notes: Provide obscured glazing for windows to be installed in Unisex ADA Toilets 101 & 102.

Comment / Room:

None Assigned

Line Item #	Qty	Width x Height	UI	Description	Net Price	Extended
2	1	52.875" X 16.375"	70		\$262.83	\$262.83

1914-1900 Series 52.875 x 16.375  
DH Integral Brickmould J-channel 1" Nailfin Setback  
Frame Color = White  
CLIMATECH, DS / 3/16, OBSCURE FULL  
U-Factor = 0.27, CR = 61, SHGC = 0.33, VT = 0.61, CPD  
= ASO-A-121-00037-00001  
Exterior Casing = No Exterior Casing, No Jamb Extension,  
Frame Size  
Vertical Factory 0.5" thick, 16.375" length

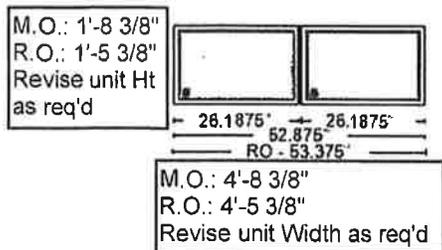

Line Item Notes:

Comment / Room:


None Assigned

I 1/2

QUOTE #	RUSH	STATUS	PO#
2444485	No	None	

Line Item #	Qty	Width x Height	UI	Description	Net Price	Extended
3	4	34" X 52.875"	87		\$189.00	\$756.00

1901-1900 Series Double Hung 34 x 52.875  
 Sash Split = Even  
 Operation / Venting = Double Hung  
 DH Integral Brickmould J-channel 1" Nailfin Setback  
 Frame Color = White  
 CLIMATECH, DS / 3/16  
 Full Screen  
 U-Factor = 0.29, CR = 56, SHGC = 0.32, VT = 0.58, CPD  
 = ASO-A-119-00034-00001  
 Exterior Casing = No Exterior Casing, No Jamb Extension,  
 Frame Size  
**Line Item Notes:**

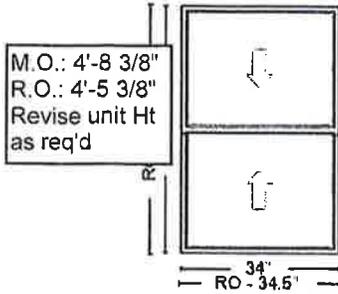

Comment / Room: M.O.: 3'-4 3/8"  
 R.O.: 3'-1 3/8"  
 Revise unit Width as req'd

None Assigned

**Customer Notes:**

**ATTENTION**

Please note that all weights provided are estimates and subject to change based on actual order shipment. For Informational Purposes: All windows are viewed from the outside looking in.

**NOTICE:** The rating information provided on this quote is based upon the NFRC ratings at the time of quote. Such ratings are subject to changes in the standard by the applicable regulatory agencies and will be finalized at the time of manufacturing. All ratings printed on the NFRC label will supersede the NFRC rating set forth in the quote. Any changes made to an order after submission may also result in changes to the NFRC rating. Customer shall be solely responsible for determining whether the product ordered meets their jurisdiction's requirements.

In accordance with the state of California:

**WARNING:** Cancer and Reproductive Harm - [www.p65Warnings.ca.gov](http://www.p65Warnings.ca.gov)

This order is subject to AMI's Standard Terms and Conditions, which can be found here: <http://www.associatedmaterials.com/Tools.html>

I have reviewed this order and certify that it is correct. I understand that this order is noncancellable, nonreturnable, and nonrefundable.

By \_\_\_\_\_ Authorized Representative

Total Unit Count	17
TOTAL WEIGHT	92.0
SUB-TOTAL:	\$2,335.31
SALES TAX 1	\$0.00
SALES TAX 2:	\$0.00
LABOR:	\$0.00
FREIGHT:	\$0.00
TOTAL:	\$2,335.31

## John Destefano

---

**From:** steve <sbourassa16@yahoo.com>  
**Sent:** Friday, December 6, 2019 6:28 AM  
**To:** John Destefano  
**Subject:** RE: Pricing

Yes all ceilings

Sent from Yahoo Mail on Android

On Fri, Dec 6, 2019 at 6:25 AM, John Destefano  
<john.d@destefano-associates.com> wrote:

Does it include the PVC as shown on A2.1

John DeStefano

DeStefano & Associates, Inc

2456 Lafayette Road

Portsmouth, NH 03801

p: 603-430-0339

f: 603-430-0346

c: 603-765-1638

[www.destefano-associates.com](http://www.destefano-associates.com)

JJ

**From:** steve <sbourassa16@yahoo.com>  
**Sent:** Wednesday, December 4, 2019 2:42 PM  
**To:** John Destefano <john.d@destefano-associates.com>  
**Subject:** RE: Pricing

No labor only pricing.

Sent from Yahoo Mail on Android

On Wed, Dec 4, 2019 at 2:41 PM, John Destefano

<[john.d@destefano-associates.com](mailto:john.d@destefano-associates.com)> wrote:

Supply as well?

John DeStefano  
DeStefano & Associates, Inc  
2456 Lafayette Road  
Portsmouth, NH 03801  
p: 603-430-0339  
f: 603-430-0346  
c: 603-765-1638

J 4

[www.destefano-associates.com](http://www.destefano-associates.com)

**From:** steve <[sbourassa16@yahoo.com](mailto:sbourassa16@yahoo.com)>  
**Sent:** Wednesday, December 4, 2019 2:37 PM  
**To:** John Destefano <[john.d@destefano-associates.com](mailto:john.d@destefano-associates.com)>  
**Subject:** Pricing

Tg wood ceiling in bathrooms 16,000.

Sent from Yahoo Mail on Android



**PAUL  
WHITE  
COMPANY**

**COMMERCIAL**

444 Riverside Industrial Pkwy  
Portland, Maine 04103  
(207) 797-7949  
www.paulwhitecompany.com

REV#3: 12/06/2019  
DATE: 4/30/2019

ATTN: John DeStefano RE: Ogunquit Bathhouse – Main Beach  
DeStefano & Associates Ogunquit, ME

We are pleased to submit the following proposal for our work in connection with the above-mentioned project, as per plans and specifications on the following:

FOR THE TOTAL PRICE OF \$29,520.00 WE WILL FURNISH AND INSTALL:

- Epoxy: Dur-A-Flex, Dur-A-Quartz with 4" Epoxy Base - \$15,797.00
- Ceramic Tile: Daltile, Slate Attache 12"x24" with Metal Trim - \$13,255.00
- Resilient Base: Tarkett, Baseworks Thermoset Rubber Cove Base 4" - \$468.00

**Addenda 1-3 Acknowledged**

THIS PROPOSAL IS SUBMITTED WITH THE UNDERSTANDING THAT IF IS ACCEPTED THE CONDITIONS NOTED BELOW SHALL GOVERN THE WORK COVERED BY THIS BID, UNLESS SPECIAL CONDITIONS ARE AGREED UPON.

1. Excludes all floor prep except for minor
2. Moisture testing to be completed by a 3<sup>rd</sup> party.
3. All ceramic to be standard thin set and urethane grout application. Waterproofing/Crack Suppression Membrane included at all wall tile. Showers not included.
4. PWC carried Schluter Kerdi on walls in lieu of Ditra.
5. Sloping of concrete not included, by others.
6. Sealing, waxing and protection of finishes not included, by others.

FEEL FREE TO CALL WITH ANY QUESTIONS.

VERY TRULY YOURS,

K



SALES & INSTALL OF CONSTRUCTION SPECIALTIES

10 Lane Rd.  
 Raymond, NH 03077  
 Tel: (866) 966-9113  
 Fax: (866) 582-9141  
[estimating@granitestatespecialties.com](mailto:estimating@granitestatespecialties.com)  
[www.granitestatespecialties.com](http://www.granitestatespecialties.com)

# Proposal

Proposal #: 201912031CL  
 Date: 01/02/2020

**\*Quote Valid for 90 Days\***

ESTIMATOR
Cindy Langevin

CUSTOMER	PROJECT NAME
DeStefano & Associates 2456 Lafayette Rd, Suite 3 Portsmouth, NH 03801	Ogunquit Bathhouse Main Beach Ogunquit, ME 03907
Notes	

\*\*\*All blocking and rough openings by others

\*\*\*Quoted Electric Hand Dryers Furnish Only\*\*\* Install by Others\*\*

\*\*\*Please note Furnish Only sections do not include any fasteners or mounting hardware, except those noted to be included on the manufacturer's tech data/submittal sheet. Also excludes any blocking, rough openings, sealants, caulking, or backer rods.

All material is to be drop shipped FOB jobsite, to the tailgate, received by others. All field measuring, layout coordination with other trades, unloading, and material distribution is by others.

\*\*\*Quote valid for 90 days with product shipped within 6 months

\*\*\*Price includes (1) mobilization, to jobsite, additional mobilizations will require an approved change order

\*\*\* No Textura or GC Pay charge quoted, will require an approved change order if applied\*\*\*

\*\*\*No Sales Tax Included\*\*\*

**10 21 13 Toilet Partition:**

- 28 Ea Bradley Series 400, Floor Mount Overhead Braced Stainless, Chrome Hardware, Latch Indicator, SS, Door Pulls
- 8 Ea Urinal Screens

30,250 v- 2876

Field Measure  
 Delivery and Installation

**10 28 00 Toilet and Bathroom Accessories:**

18,370

- 38 Ea, CH, Bradley 9114
- 10 Ea, GB, 832-001-42
- 6 Ea, GB, 832-001-36
- 4 Ea, Frameless Mirror, 7481-2436
- 4 Ea, Frameless Mirror, 7481-3672
- 5 Ea, BCS, 9632, Cream Bradex
- 32 Ea, Toilet Paper Disp, 5425
- 10 Ea, Dual Sanitary Napkin Disp, 4721-15
- 6 Ea, Sanitary Napkin Disp, Surface, 4722-15
- 15 Ea, Soap Dispenser, 6562
- 14 Ea, Elec. Hand Dryer, 2923-287400

Freight  
 Delivery and Installation

*Approved + Accepted  
 JDD 1/3/20*

**Proposal Total: 48,620**

L

# PURCHASE ORDER



**DeStefano & Associates, Inc.**  
 PLANNING • DESIGN • CONSTRUCTION

Phone 603.430.0339  
 Fax 603.430.0346  
 2456 Lafayette Road, Suite 3  
 Portsmouth, NH 03801

<b>Project Name:</b> Main Beach Bathhouse Renovations 124 Beach Street, Ogunquit, ME 03907		<b>Trade:</b> Lumber	<b>Date:</b> 12/02/2019
<b>Vendor:</b> HD Supply 255 West Road Portsmouth, NH 03801  <b>Contact Name:</b> Bruce Rolston <b>Phone No./Email:</b> 603-436-3833 Bruce.Rolston@hdsupply.com		<b>Ship To:</b> Peter Connell 124 Beach Street Ogunquit, ME 03907  <b>Contact Name:</b> Peter Connell <b>Phone No./Email:</b> 603-520-7354 peterc@destefano-associates.com	
<b>Terms:</b> NET 30, unless noted otherwise	<b>Conditions:</b> The Vendor, by accepting this order, whether in writing, verbally, or by cause of conduct, agrees to the terms and conditions on <u>page two</u> of this order.		

Per Quote Date: 12/02/2019				
Item	QTY	Description	Unit Price	Amount
		(Smart) Vent 8" x 16" 510-S SV Louvered	\$206.00	\$3,708.00
		(Flood) Vent 8" x 16" 520-S	\$206.00	\$412.00
		1540-531-12 Trim and Sleeve kit this item is special order and may be non-returnable	\$82.00	\$1,640.00
		Shipping and Handling		\$126.00

<b>Notes:</b> Certificate of Insurance required from Vendor prior to shipment and payment. Reference DAI Insurance Requirements.	<b>Subtotal</b>	\$5,886.00
	<b>Sale Tax ( %)</b>	\$0.00
	<b>Total</b>	\$5,886.00

<b>Referenced Documents:</b> Quote Number 528619	
<b>Drawing/Specification:</b> N/A	<b>Schedule:</b> N/A
<b>Supplemental Conditions:</b> Safety Conditions	<b>Shop Drawings by:</b> N/A
<b>Payment Instructions Dated:</b> 02/04/2019	<b>Delivery to Site After DAI Approval:</b> TBD
<b>Other:</b> Certificate of Insurance	<b>Completion of Work:</b> TBD
<b>Verbal Order Agreed by:</b> John DeStefano	<b>Date:</b> 12/02/2019

Agreed & Accepted	
<b>Purchaser:</b> <u>John DeStefano</u>  <b>Title:</b> <u>Project Manager</u>	<b>Vendor:</b> <u>Bruce M. Rolston</u>  <b>Title:</b> <u>ACCOUNT MANAGER</u>



# Lang Door and Hardware, LLC

2 Brookside West ~ Hooksett, NH 03106 Ph: (603) 627-2706 Fx: (603) 627-2768

www.langdoor.com ~ sales@langdoor.com

Est. No: E76850

## PROPOSAL

**DeStefano & Associates**  
2456 Lafayette Road  
Portsmouth, NH 03801

Ph: 603-430-0339 Fx: 603-430-0346

**Date: 10/14/19**  
**Attention: Trevor Lunn**  
**Reference: Ogunquit Bathhouse**  
**Prepared By: Ryan Siggins x118**

Dear Trevor Lunn

To furnish materials (and installation if listed below), we quote a package price as follows. Sections of work, when broken out separately, are for your convenience only and not necessarily an offer to sell less than the total package quoted. See below for terms and conditions. Line items do not include tax. Tax, when included is subtotaled below. HM Frames do not include sealants, coatings or insulation unless specifically mentioned below. LEEDS: Materials are priced as specified and/or as qualified below. Any available LEEDS credits are incidental to what the specifications / qualifications allow for.

<b>Code</b>	<b>Description</b>	<b>Total:</b>
590SPC	LOCKERS As manufactured by Scranton Products	<b>7,450.00T</b>
	Includes 12 Tufftec lockers (1 bank of 4 and 1 bank of 8). All are 3-tier (18" x 18" x 72") x HDPE (plastic) x standard padlock hasp x slope top x 4" base x standard horizontal venting x number plates x standard manufacturer color.	
570LDH	INSTALLATION Includes installation of the material listed above. All blocking by others.	<b>650.00</b>

<b>Tax: (5.5%)</b>	<b>\$409.75</b>
<b>Total:</b>	<b>\$8,509.75</b>

Materials: Prices are for materials as listed above. We include delivery to jobsite, FOB point of origin. We reserve the right to reject orders for less than the total package quoted. Please note that our payment terms are net/30 days for all materials and we do not allow retainage on materials. Please see our retainage policy. Glass is never included unless specifically noted otherwise.

Installation: We do not include installation of welded frames, sidelights or borrowed lights. Wages are paid at our standard shop rate. State or federal wage scales are not included unless specifically noted above. We allow for standard 10% maximum retainage on the installation portion only. Final payment must be paid no later than 90 days after the date of our last installation invoice or 90 days after the date of substantial completion, whichever is earlier.

**CAP701 - CHANGE ORDER FORM**

Change Order Number: 20235-1WtrEnt

Change Order Date: 12/17/2019

Architect's Project Number:

Project: OGUNQUIT BATHHOUSE

Our Project Code: OGUNQUIT BATHHOUSE

Contract Date: 11/25/2019

Contract for: OGUNQUIT BATHHOUSE

To:

DeStefano & Associates  
2456 Lafayette Road, Suite 3  
Portsmouth, NH 03801

From:

RIVERSIDE MECHANICAL INC  
27 REBECCA WAY  
FALMOUTH, ME 04105

Original Contract Sum:	199,575.00
Net Change by Previous Change Orders:	0.00
Contract Sum:	199,575.00
Value of this Change Order:	-2,550.00
New Contract Sum:	197,025.00

DISTRIBUTE TO:

**Contractor**

The Contract Completion date will change by:

The expected completion date will be:     //

The Contract is Changed as Follows:

Credit to remove underslab water service piping from our contract

\_\_\_\_\_  
Architect

\_\_\_\_\_  
Signature

\_\_\_\_\_  
Date

*DAI*

\_\_\_\_\_  
Contractor

*John DeStefano*  
\_\_\_\_\_  
Signature

*12/26/19*  
\_\_\_\_\_  
Date

\_\_\_\_\_  
Owner

\_\_\_\_\_  
Signature

\_\_\_\_\_  
Date



# MANCINI ELECTRIC

179 Sheridan Street  
Portland, Maine 04101-2636  
Tele: (207) 774-5829  
Fax: (207) 772-1686  
E-mail: [ianthony@maine.rr.com](mailto:ianthony@maine.rr.com)

*"We Appreciate Your Business"*

- Electrical Contractors
- AMI Telecommunications
- Electrical Contractors Management Systems

Change Order #1

December 17, 2019

DeStefano & Associates, Inc.  
2456 Lafayette Rd  
Portsmouth, NH 03801

Attn: John DeStefano

Re: : Ogunquit Bathhouse – Main Beach  
Ogunquit, ME

John,

The following is the proposed CREDIT for changes made within Addendum #3 dated November 26, 2019 on plans E1.0 and E1.1.

**Total Credit:** (\$2,500.00)

**NOTE:**

After inspection the existing meter disconnect can remain in place. Keeping the existing meter will offset the additional cost of upgrading the panel size as outlined within Addendum #3.

If you should have any questions please feel free to contact us at the office.

Sincerely

Michael Merrill  
Estimator